



COREXOM R405LQ LR MODULE DATASHEET

Rev. V0.3 (Preliminary)
2024/07/02

P/N : 80.F1J01G003



Revision History

Rev.	Date	Description
0.0	2024/03/27	Draft
0.1	2024/04/01	Model name updated
0.2	2024/06/25	P2. Updated Key SW function name (valid start from FW versions 0.0.70 and 2.0.6)
0.3	2024/07/03	P2. Add new item #19 to explain the function of PJ1 Conn

CRI Confidential

About This Document

- Illustrations in this documentation might look different from your product.
- Depending on the model, some optional accessories, features, and software programs might not be available on your device.
- Depending on the version of operating systems and programs, some user interface instructions might not be applicable to your device.
- Documentation content is subject to change without notice. Coretronic Reality Inc. (CRI) makes constant improvements on the documentation of your computer, including this guidebook.

CRI Confidential

Table of Contents

1. Introduction	1
1.1 Features and Specification.....	1
1.2 Major interface components location.....	2
2. Device Tools Operation.....	3
2.1 AP mode Menu operation	3
2.1.1 Settings (SSID).....	4
2.2 STA (Cline) mode Menu operation.....	9
2.2.1 STA (Cline) Setting	9
2.2.2 STA Connection status	10
2.2.3 STA Throughput Test.....	11
2.3 System Menu operation	12
2.3.1 System – Enable device as SAP mode.....	12
2.3.2 System – Enable device as STA mode.....	12
2.3.3 System – Enable iperf service.....	12
2.4 Throughput test by paired 2 sets EVA Kit.....	13
2.4.1 Setup at AP side	13
2.4.2 Setup at STA (Cline) side.....	13
2.4.3 Perform iperf test	13
3. Mechanical Specification.....	14
3.1 R405LQ LR module Mechanical dimensions	14
3.2 Weight.....	14
4. Product Marking, Ordering and Shipping Info.	14
4.1 Product Marking (Label)	14

1. Introduction

CRI R405LQ LR Module is a high performance wireless network device, and leverage WiFi technology to implement long distance connection and data communication. It can through USB or UART to connect with Host controller, and work similar as external WiFi network module. The R405LQ can support RNDIS (Remote Network Driver Interface Specification) standard as module interface control.

When using R405LQ LR to build up connection network, please need to set up one of R405LQ LR as AP mode (default), and others R405LQ LR are set as STA (Client) mode. They are communicate working in closed network areas.

1.1 Features and Specification

The following table shows the detailed features and Spec. of R405LQ LR module.

Key features of R405LQ LR module


Item	Description
Platform	Qualcomm QCS405 + QCN9074
Technology	Leverage Wi-Fi 6 (802.11ax)
MIMO	4T4R
Frequency	<ul style="list-style-type: none">● 2412MHz~2462MHz● 5180MHz~5240MHz / 5745MHz~5825MHz
RF signal B.W	5MHz / 10MHz / 20MHz
Throughput	240 Mbps (TBC)
Radio Tx Power	<ul style="list-style-type: none">● $\leq 24\text{dBm}$ @ 2.4GHz● $\leq 24\text{dBm}$ @ 5GHz
Distance	> 10KM (Open space without distractions)
Connection Interfaces	<ol style="list-style-type: none">1. USB 3.0 (Type C)2. USB 2.0 (Micro USB, for FW UD)3. UART x2 (1.8V)4. UART x1 (3.3V, for Debug only)5. Buttons x6
Power Supply	DC 6.6V~17V via Power Jack
Power Consumption	<ul style="list-style-type: none">● 2.4GHz 4T4R Tx < 9.8W● 2.4GHz 4T4R Rx < 4.0W● 5GHz 4T4R Tx < 13.8W● 5GHz 4T4R Rx < 4.5W
Dimension	60 x 72 x 9.9 mm

Item	Description
Weight	Around 21 g
Operation Temp.	-20 ~ 70 °C
Storage Temp.	-20 ~ 70 °C
Device Driver	RNDIS (Remote Network Driver Interface Specification)

Notice : When using, be sure to connect the antenna as a load at the antenna terminal to prevent no-load reflection from damaging the PA.

1.2 Major interface components location

Below picture identify the major interface components and connectors found on the R405LQ LR module

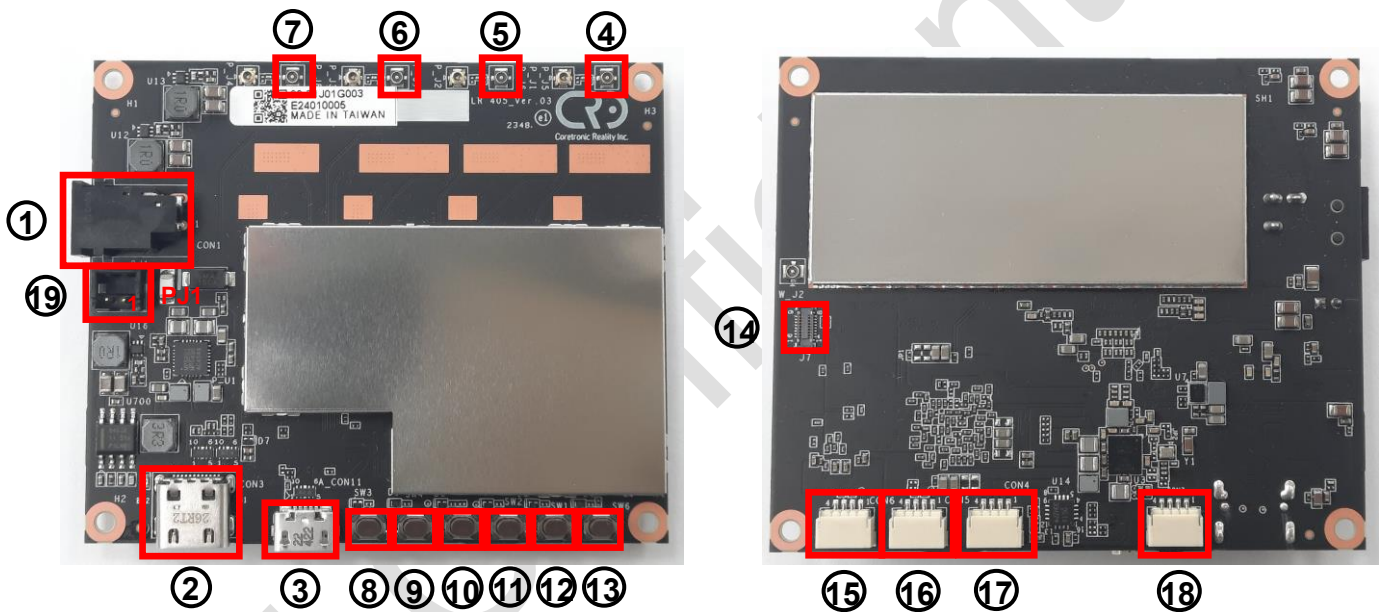

No.	Function Description	No.	Function Description
1	DC Power Jack	11	Key SW, FAST BOOT MODE *1
2	USB 3.0 Type C	12	Key SW, N/A
3	USB 2.0 Micro (for FW UD)	13	Key SW, USB BOOT *1
4	RF Conn, Chain 1	14	JTAG (for Debug only)
5	RF Conn, Chain 2	15	UART (1.8V)
6	RF Conn, Chain 3	16	UART (1.8V)
7	RF Conn, Chain 4	17	UART (3.3V, for Debug only)
8	Key SW, Power	18	USB 2.0 (ALT with #3 for FW UD)
9	Key SW, Volume up +	19	Option Power Conn PJ1 *2 (Hirose, DF3-2P-2DSA(01))
10	Key SW, Volume down -		

*1 Keep pressing during power on entry

*2 pin-1 : DC power in, pin-2 : GND

2. Device Tools Operation

This chapter introduces the detail setup and testing steps of R405LQ LR Module build in configuration tools, and via PC's connection and operation. Please install the ADB (Android Debug Bridge) environment in your PC at first, then refer [section 1.2](#) to setup R405LQ LR Module and connected with PC via USB cable.

Please use the "adb devices" command to check whether the R405LQ LR module is successfully connected to the PC ? Then use the "crifcg" command to enter the device tool's control menu of R405LQ LR Module.

```
jeffrey@TP620:~$ adb devices
List of devices attached
e057c36 device

jeffrey@TP620:~$ adb shell
sh-5.0#
sh-5.0# crifcg _
```

2.1 AP mode Menu operation

R405LQ LR EVA KIT can be configured as AP (Access Point) mode or STA (Station, Cline) mode through System Menu setup. This section introduces when R405LQ LR is configured as AP mode then re-power on. After connected with ADB PC, and enter "crifcg" command. The items select Menu will be shown on ADB PC as below.

```
1.0110.1
loadConfig: channel: 36, freq: 5180
loadConfig: bandwidth: 20MHz
loadConfig: mode: 11AHE20

*****CRI Wi-Fi Config Tool - Menu*****
  SAP Menu
  1: SAP - Settings
  2: SAP - Service Switch (on/off)
  3: SAP - Switch Channel / Bandwidth
  4: SAP - Advance setting (CBS/SBS/Long Range)
  5: SAP - Get Current Channel and Bandwidth
  6: SAP - Get RSSI
  7: SAP - Throughput test

  System Menu
  91: System - Enable device as SAP mode.
  92: System - Enable device as STA mode.
  93: System - Enable iperf service.
  95: Device Info
  99: Factory Reset.

  0. Exit.

Please enter the operation number to be performed: _
```

2.1.1 Settings (SSID)

When enter “1” at top menu, then into “SAP - settings” menu.

```
***** CRI Wi-Fi Config Tool - Menu *****
SAP settings
1: SAP - Get the Current And PSK.
2: SAP - Set the New SSID And PSK

0. Exit.

Please enter the operation number to be performed: _
```

You can enter “1” again to get current SSID and Password set

```
ssid=CRIssidJeff
#wpa_passphrase=12345678

***** CRI Wi-Fi Config Tool - Menu *****
SAP settings
1: SAP - Get the Current And PSK.
2: SAP - Set the New SSID And PSK

0. Exit.

Please enter the operation number to be performed: _
```

Or, enter “2” to setup new SSID and Password.

```
Please enter the new Hostpot_SSID: CRIssidJeff
Please enter the new Hostpot_PSK:12345678
command failed: Invalid argument (-22)
l2_packet_init: ioctl[SIOCGIFINDEX]: No such device
Failed to open l2_packet interface for vlan bridge
ath0: interface state UNINITIALIZED->ENABLED
ath0: AP-ENABLED

***** CRI Wi-Fi Config Tool - Menu *****
SAP settings
1: SAP - Get the Current And PSK.
2: SAP - Set the New SSID And PSK

0. Exit.

Please enter the operation number to be performed: _
```

Or, enter “0” will exit to go back top Menu

2.1.2 Switch Channel and Bandwidth

When enter “3” at top menu, then into “SAP - Switch Channel / Bandwidth” menu.

```
***** CRI Wi-Fi Config Tool - Menu *****
SAP Channel / Bandwidth settings
1: SAP - Get Current Channel and Bandwidth.
2: SAP - Switch Channel.
3: SAP - Switch Bandwidth.
4: SAP - Switch Channel and Bandwidth.

0. Exit.

Please enter the operation number to be performed: _
```

You can enter “1” to get current Channel and Bandwidth information, or enter “2” to change the Channel number, or enter “3” to change Channel Bandwidth. Or, enter “4” to change Channel and Bandwidth in the same time.

```
Please enter the new channel: 44
Bandwidth only support: 0: 20MHz, 1: 10MHz, 2: 5MHz
Please enter the new bandwidth: [0/1/2]: 0
Change channel to 44 with bandwidth to 20 MHz, please wait...
loadConfig: channel: 44, freq: 5220
loadConfig: bandwidth: 20MHz
loadConfig: mode: 11AHE20

Channel changed to 44 successfully.

getBandwidthInt: bandwidth: 0
Bandwidth changed to 20MHz successfully.

***** CRI Wi-Fi Config Tool - Menu *****
SAP Channel / Bandwidth settings
1: SAP - Get Current Channel and Bandwidth.
2: SAP - Switch Channel.
3: SAP - Switch Bandwidth.
4: SAP - Switch Channel and Bandwidth.

0. Exit.

Please enter the operation number to be performed: _
```

Or, enter “0” will exit to go back top Menu

2.1.3 Advance Setting (CBS / SBS /Long Range)

When enter “4” at top menu, then into “SAP – Advance setting CBS/SBS/Long Range)” menu.

```
***** CRI Wi-Fi Config Tool - Menu *****
  Advance setting
  1. SAP - Enable ACS 5G (Auto Channel Selection)
  2. SAP - Enable ACS 2.4G (Auto Channel Selection)
  3: SAP - Enable LR (Long Range).
  4: SAP - Enable DCS+CBS.
  5: SAP - Enable DCS+SBS.

  0. Exit.

Please enter the operation number to be performed: _
```

CRI Confidential

2.1.4 Get RSSI

When enter “6” at top menu, then can get RSSI information shows in below as reference depend on R405LQ LR working environment and situation.

```
ADDR          AID CHAN TXRATE RXRATE RSSI MINRSSI MAXRSSI IDLE TXSEQ RXSEQ CAPS XCAPS ACAPS      ERP
STATE MAXRATE(DOT11) HTCAPS VHTCAPS ASSOCTIME IEs  MODE RXNSS TXNSS          PSMODE
44:a8:42:ff:46:df 1  44  6M   17M  -51   -52   -51  27   0  65535  Es ETWt NULL  0
b          286800          APM          1gTRs 00:04:05  WME IEEE80211_MODE_11AXA_HE20 4 2  0

RSSI is combined over chains in dBm
Minimum Tx Power      : 0
Maximum Tx Power     : 0
HT Capability         : Yes
VHT Capability        : Yes
MU capable            : No
SNR                   : 42
Operating band        : 5GHz
Current Operating class : 115
Supported Operating classes : 81 82 83 84 115 116 117 118 119 120 121 122 123 124 125 126
127 128 130
Supported Rates       : 12 18 24 36 48 72 96 108
Max STA phymode       : IEEE80211_MODE_11AXA_HE20
00:03:7f:06:00:22 2  44  6M   14M  -15   -15   -12  54   0  65535  Es ETWt NULL  0
b          144400          APM          1gTRs 00:04:04  WME IEEE80211_MODE_11NA_HT20 4 2  0
```

CRI Confidential

2.1.5 Throughput Test

When enter “7” at top menu, then into “SAP – Throughput Test” menu

```
***** CRI Wi-Fi Config Tool - SAP throughput test *****
1: TCP: iperf 10 seconds
2: TCP: iperf 60 seconds
3: TCP: assign time
4: UDP: iperf 10 seconds
5: UDP: iperf 60 seconds
6: UDP: assign time

0. Exit.

Please enter the operation number to be performed: _
```

Choose the throughput test item number to perform the test as requirement, and result shows in below as reference

```
[ 4] 1.01-2.01 sec 14.5 MBytes 122 Mbits/sec 1860 (omitted)
[ 4] 2.01-3.00 sec 14.4 MBytes 121 Mbits/sec 1840 (omitted)
[ 4] 0.00-1.00 sec 14.2 MBytes 119 Mbits/sec 1820
[ 4] 1.00-2.01 sec 14.5 MBytes 121 Mbits/sec 1850
[ 4] 2.01-3.01 sec 13.4 MBytes 112 Mbits/sec 1710
[ 4] 3.01-4.00 sec 14.4 MBytes 121 Mbits/sec 1840
[ 4] 4.00-5.00 sec 14.2 MBytes 119 Mbits/sec 1820
[ 4] 5.00-6.00 sec 14.1 MBytes 118 Mbits/sec 1800
[ 4] 6.00-7.00 sec 13.8 MBytes 115 Mbits/sec 1760
[ 4] 7.00-8.00 sec 13.2 MBytes 111 Mbits/sec 1690
[ 4] 8.00-9.01 sec 13.4 MBytes 112 Mbits/sec 1710
[ 4] 9.01-10.00 sec 13.9 MBytes 117 Mbits/sec 1780
-----
[ ID] Interval          Transfer      Bandwidth      Jitter      Lost/Total Datagrams
[ 4] 0.00-10.00 sec 139 MBytes 117 Mbits/sec 0.664 ms 0/17780 (0%)
[ 4] Sent 17780 datagrams

iperf Done.

***** CRI Wi-Fi Config Tool - SAP throughput test *****
1: TCP: iperf 10 seconds
2: TCP: iperf 60 seconds
3: TCP: assign time
4: UDP: iperf 10 seconds
5: UDP: iperf 60 seconds
6: UDP: assign time

0. Exit.
```

2.2 STA (Cline) mode Menu operation

This section introduces when R405LQ LR is configured as STA (Cline) mode then re-power on. After connected with ADB PC, and enter “cricfg” command. The below items select Menu will shows on ADB PC.

```
1.0129.1
***** CRI Wi-Fi Config Tool - Menu *****
  STA Menu
1: STA - Scan the Available Hotspots
2: STA - Settings
3: STA - Service Switch (on/off)
4: STA - Connection status
5: STA - Throughput test

  System Menu
91: System - Enable device as SAP mode.
92: System - Enable device as STA mode.
93: System - Enable iperf service.
95: Device Info
99: Factory Reset.

0. Exit or Return to the Upper Level Directory.

Please enter the operation number to be performed: _
```

2.2.1 STA (Cline) Setting

When enter “1” at top menu, then into “STA - Settings” menu.

```
  STA Settings
1: STA Mode: Show WPA supplicant network Info.
2: STA Mode: Get Connected SSID And PSK.
3: STA Mode: Add new SSID And PSK.
4: STA Mode: Remove Saved SSID.
5: STA Mode: List the Actived WPA supplicant.

0. Exit or Return to the Upper Level Directory.

Please enter the operation number to be performed: _
```

You can enter “2” to get current connected SSID of AP

```
Current current connection, ssid: CRIssidJeff

  STA Settings
1: STA Mode: Show WPA supplicant network Info.
2: STA Mode: Get Connected SSID And PSK.
3: STA Mode: Add new SSID And PSK.
4: STA Mode: Remove Saved SSID.
5: STA Mode: List the Actived WPA supplicant.

0. Exit or Return to the Upper Level Directory.

Please enter the operation number to be performed: 2_
```

Or, enter “5” to get the list of active WPA supplicant which shows as below picture as reference.

```

network id / ssid / bssid / flags
0      CRIssidJeff   any      [CURRENT]

STA Settings
1: STA Mode: Show WPA supplicant network Info.
2: STA Mode: Get Connected SSID And PSK.
3: STA Mode: Add new SSID And PSK.
4: STA Mode: Remove Saved SSID.
5: STA Mode: List the Actived WPA supplicant.

0. Exit or Return to the Upper Level Directory.

Please enter the operation number to be performed: 5_

```

2.2.2 STA Connection status

When enter “4” at top menu, then get current W405LQ LR Cline connection information.

```

***** CRI Wi-Fi Config Tool - Menu *****
STA Menu
1: STA - Scan the Available Hotspots
2: STA - Settings
3: STA - Service Switch (on/off)
4: STA - Connection status
5: STA - Throughput test

System Menu
91: System - Enable device as SAP mode.
92: System - Enable device as STA mode.
93: System - Enable iperf service.
95: Device Info
99: Factory Reset.

0. Exit or Return to the Upper Level Directory.

Please enter the operation number to be performed: 4_

```

```

Connected to 46:a8:42:ff:46:a8 (on ath1)
SSID: CRIssidJeff
freq: 5220

```

2.2.3 STA Throughput Test

When enter “5” at top menu, then into “STA – Throughput Test” menu

```
***** CRI Wi-Fi Config Tool - STA throughput test *****
1: TCP: iperf 10 seconds
2: TCP: iperf 60 seconds
3: TCP: assign time
4: UDP: iperf 10 seconds
5: UDP: iperf 60 seconds
6: UDP: assign time

0. Exit or Return to the Upper Level Directory.

Please enter the operation number to be performed: 4_
```

Choose the throughput test item number to perform the test as requirement, and result shows in below as reference

```
run: iperf3 10 seconds in UDP.
◆◆eU
Connecting to host 192.168.1.1, port 5201
[ 4] local 192.168.1.2 port 46308 connected to 192.168.1.1 port 5201
[ ID] Interval          Transfer          Bandwidth        Total Datagrams
[ 4] 0.00-1.00 sec      11.6 MBytes      96.9 Mbits/sec   1480 (omitted)
[ 4] 1.00-2.00 sec      13.8 MBytes      116 Mbits/sec   1770 (omitted)
[ 4] 2.00-3.00 sec      18.9 MBytes      158 Mbits/sec   2420 (omitted)
[ 4] 0.00-1.00 sec      19.5 MBytes      163 Mbits/sec   2490
[ 4] 1.00-2.00 sec      18.3 MBytes      154 Mbits/sec   2340
[ 4] 2.00-3.00 sec      21.8 MBytes      183 Mbits/sec   2790
[ 4] 3.00-4.00 sec      16.3 MBytes      137 Mbits/sec   2090
[ 4] 4.00-5.00 sec      20.2 MBytes      170 Mbits/sec   2590
[ 4] 5.00-6.00 sec      20.0 MBytes      168 Mbits/sec   2560
[ 4] 6.00-7.00 sec      20.2 MBytes      169 Mbits/sec   2580
[ 4] 7.00-8.00 sec      20.2 MBytes      170 Mbits/sec   2590
[ 4] 8.00-9.01 sec      17.5 MBytes      146 Mbits/sec   2240
[ 4] 9.01-10.00 sec     14.1 MBytes      119 Mbits/sec   1800
-----
[ ID] Interval          Transfer          Bandwidth        Jitter    Lost/Total Datagrams
[ 4] 0.00-10.00 sec     188 MBytes      158 Mbits/sec    0.718 ms  1081/24064 (4.5%)
[ 4] Sent 24064 datagrams

iperf Done.
```

2.3 System Menu operation

The “System Menu” are common supported by both AP mode and STA (Cline) mode of R405LQ LR.

```
System Menu
91: System - Enable device as SAP mode.
92: System - Enable device as STA mode.
93: System - Enable iperf service.
95: Device Info
99: Factory Reset.

0. Exit or Return to the Upper Level Directory.

Please enter the operation number to be performed: _
```

2.3.1 System – Enable device as SAP mode

When enter “91” at top menu, then R405LQ LR module will be configured as AP mode, and disable STA (Cline) mode.

Note : The system only changes the configuration file. To complete the change mode, you need to restart the device.

2.3.2 System – Enable device as STA mode

When enter “92” at top menu, then R405LQ LR module will be configured as STA (Cline) mode, and disable AP mode

Note : The system only changes the configuration file. To complete the change mode, you need to restart the device.

2.3.3 System – Enable iperf service

When enter “93” at top menu, then R405LQ LR module will enable iperf service.

After enable iperf service, the R405LQ LR can perform to response specified iperf test package on network.

2.3.4 Device Info

2.3.5 Factory Reset

2.4 Throughput test by paired 2 sets EVA Kit

This chapter will introduce how to use 2 sets EVA Kit, one is setup as AP mode, and another one is setup as STA mode, then through R405LQ module build in tools to perform “iperf” throughput test as evaluation case.

2.4.1 Setup at AP side

- A. Please refer [chapter 2.3.1](#) System Menu 91 operation to setup 1st EVA Kit as AP mode. Please re-power off/on once mode has been changed.
- B. Please refer [chapter 2.3.3](#) System Menu 93 operation to Enable iperf service.

2.4.2 Setup at STA (Cline) side

- A. Please refer [chapter 2.3.2](#) System Menu 92 operation to setup 2nd EVA Kit as STA (Cline) mode. Please re-power off/on once mode has been changed.
- B. Please refer [chapter 2.3.3](#) System Menu 93 operation to Enable iperf service
- C. Please refer [chapter 2.2.2](#) STA Menu 4, to check WiFi connection status, and confirmed WiFi has been connected.

2.4.3 Perform iperf test


- A. Please refer [chapter 2.2.3](#) STA Menu 5, to enter STA Throughput Test Menu. Then, choose the test item which you would like to do ?
- B. For example, after enter 4, then the test result of “UDP : iperf 10 second“ will be shown like below picture.

```
run: iperf3 10 seconds in UDP.
◆◆eU
Connecting to host 192.168.1.1, port 5201
[ 4] local 192.168.1.2 port 46308 connected to 192.168.1.1 port 5201
[ ID] Interval          Transfer      Bandwidth    Total Datagrams
[ 4]  0.00-1.00      sec  11.6 MBytes  96.9 Mbits/sec  1480 (omitted)
[ 4]  1.00-2.00      sec  13.8 MBytes  116 Mbits/sec  1770 (omitted)
[ 4]  2.00-3.00      sec  18.9 MBytes  158 Mbits/sec  2420 (omitted)
[ 4]  0.00-1.00      sec  19.5 MBytes  163 Mbits/sec  2490
[ 4]  1.00-2.00      sec  18.3 MBytes  154 Mbits/sec  2340
[ 4]  2.00-3.00      sec  21.8 MBytes  183 Mbits/sec  2790
[ 4]  3.00-4.00      sec  16.3 MBytes  137 Mbits/sec  2090
[ 4]  4.00-5.00      sec  20.2 MBytes  170 Mbits/sec  2590
[ 4]  5.00-6.00      sec  20.0 MBytes  168 Mbits/sec  2560
[ 4]  6.00-7.00      sec  20.2 MBytes  169 Mbits/sec  2580
[ 4]  7.00-8.00      sec  20.2 MBytes  170 Mbits/sec  2590
[ 4]  8.00-9.01      sec  17.5 MBytes  146 Mbits/sec  2240
[ 4]  9.01-10.00     sec  14.1 MBytes  119 Mbits/sec  1800
-----
[ ID] Interval          Transfer      Bandwidth    Jitter      Lost/Total Datagrams
[ 4]  0.00-10.00     sec  188 MBytes  158 Mbits/sec  0.718 ms  1081/24064 (4.5%)
[ 4] Sent 24064 datagrams

iperf Done.
```

3. Mechanical Specification

3.1 Mechanical dimensions

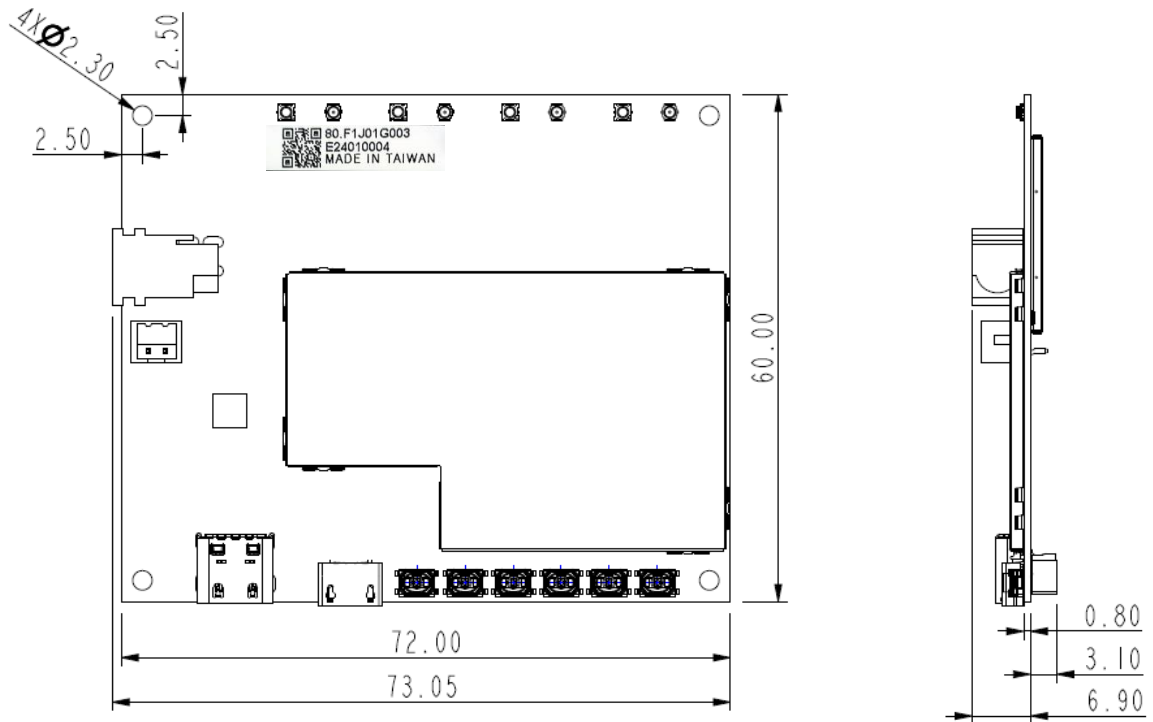

3.2 Weight

Around 21 ± 2 g

4. Product Marking, Ordering and Shipping Info.

4.1 Product Marking (Label)

